


UVA 151

ABSORBE 99% DES UVA

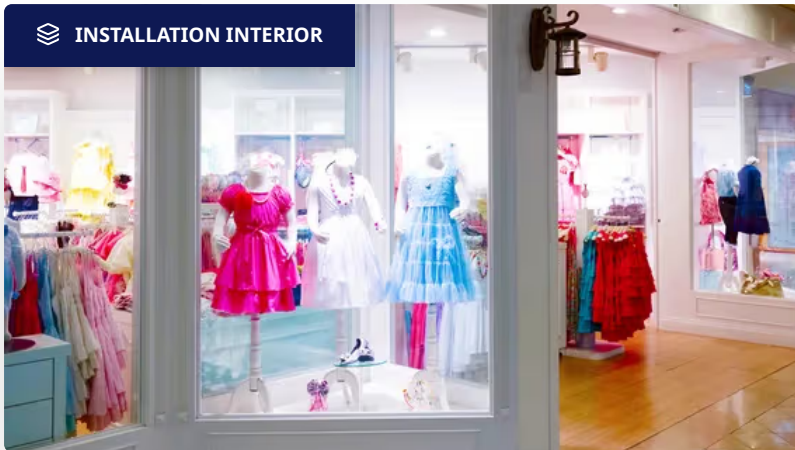

DESCRIPTION

UVA 151 is a completely clear anti-UV film that absorbs 99% of UVA rays. 92% VLT, invisible on glazing. The benchmark UV protection for shopfronts, museums and sensitive spaces.

- DURABILITY**
Indicative durability: up to 8 years outdoors and 20 years indoors.
- MAINTENANCE**
30 days after installation.
- STORAGE**
5 years away from moisture.

APPLICATION METHOD

The surface to be bonded must be free of dust, grease, or any other contaminant. Some materials like polycarbonate can cause bubbling. A compatibility test is therefore recommended.

GLAZING COMPATIBILITY

-  SINGLE
-  TEMPERED
-  DOUBLE <1.20M
-  DOUBLE >1.20M
-  LAMINATED

GLAZING COMPLIANCE

Glazing exposed to the sun must be of good quality and installed in compliance with glazing standards to guarantee the performance and durability of the film.

IMPORTANT NOTE

To ensure perfect uniformity across a project, it is recommended to exclusively use films from the same production batch and not mix different widths. Slight variations in tint or appearance may occur from one batch to another or depending on the widths, which could lead to visible differences once the strips are installed side by side.

PERFORMANCES

EN 410

APPLICATION FACE	Interior
SUPPORT	PET
↳ SUPPORT THICKNESS	23 microns
PROTECTOR	Silicone PET
↳ THICKNESS PROTECTOR	46 microns
ADHESIVE	Acrylic polymer
COLOR	colorless
TREATMENT	Anti-scratch
ULTRA-VIOLET ABSORPTION	99% UVA
APPLICATION TEMPERATURE	+ 5°C
APPLICATION	Soapy water

WARRANTY

10 years

AVAILABLE DIMENSIONS

WIDTH

152 cm

LENGTHS (ROLLS)

10 m

30 m